

Acute ADP series Differential Probe

- USB Power (power bank)
- Bandwidth : 25MHz / 100MHz
- Bandwidth limit : 5MHz / Full
- Over-range indicator
- Over-range alarm
- Double-layer probe cable for power insulation
- EC conformity : EN 61010-031:2002 + A1:2008
- Works for any DSO with an USB port



Model	ADP1025 ADP1100	ADP2025 ADP2100	ADP5025 ADP5100
Bandwidth	25MHz 100MHz	25MHz 100MHz	25MHz 100MHz
Attenuation	10X / 100X	20X / 200X	50X / 500X
Input Voltage (DC+ pk AC)	700V	1400V	3500V
Measurement Categories	CAT II 600V CAT III 300V	CAT II 1000V CAT III 600V	CAT I 2300V CAT III 1000V



145 x 45 x 20 mm³

Acute®

PC-based T&M Instruments

Acute Technology Inc.

Tel: +886-2-2999-3275 E-mail: service@acute.com.tw <http://www.acute.com.tw>



Differential Probe


Model	ADP1025	ADP1100	ADP2025	ADP2100	ADP5025	ADP5100	
Bandwidth (-3dB)	25MHz	100MHz	25MHz	100MHz	25MHz	100MHz	
Attenuation	1:10/100		1:20/200		1:50/500		
DC Gain Accuracy	±2%						
Offset zero (Scope gain=1X)	±10 mV						
Input Impedance	Between Inputs	10Mohm, 1pF				20Mohm, 1pF	
	Each input to Gnd	5Mohm, 2pF				10Mohm, 2pF	
Rise time (small signal, 10-90%, 20-30°C)	14ns	≤3.7ns	14ns	≤3.7ns	14ns	≤3.7ns	
Input voltage	Diff. Vin (DC+ pk AC)	100X: ±700V 10X: ±70V		200X: ±1400V 20X: ±140V		500X: ±3500V 50X: ±350V	
	Comm. Vin	±700V		±1400V		±3500V	
	Max. Vin to Earth EN 61010-031:2002 +A1:2008	CAT II 600V CAT III 300V		CAT II 1000V CAT III 600V		CAT I 2300V CAT III 1000V	
	Impulse withstand	2500V		4000V		6000V	
CMRR (typical)	60Hz: > 80dB						
	100kHz: > 60dB						
	3MHz: > 40dB						
	10MHz: > 35dB						
Output swing	±7V (to 1Mohm load)						
Offset adjusting range (Scope gain=1X)	Coarse: ±150mV Fine: ±30mV						
Bandwidth limit filters	-3dB @ ~5MHz						
Diff. overvoltage detection level	100X: > ±700 V 10X: > ±70 V		200X: > ±1400 V 20X: > ±140 V		500X: > ±3500 V 50X: > ±350 V		
Temperature	Operating	0°C to 40°C (32°F to 104°F)					
	Storage	-30°C to 70°C (-22°F to 158°F)					
Humidity	Operating	5 to 85% RH (Relative Humidity) @ 0°C to 40°C (32°F to 104°F)					
	Storage	5 to 85% RH @ up to 40°C (104°F)					
		5 to 45% RH @ 40 to 70°C (104 to 158°F)					
Power requirement	USB (5V, < 250mA)						
Body dimension(mm³)	145,45,20 (L,W,H)						
Weight	180g (Probe body only)						
Length of BNC / USB-cable	90 cm						
Length of Lead-cable	24 cm						

※ Only connect to a grounded oscilloscope !

Packing list

Item	Quantity
1. ADP device	1
2. Grip (Red, Black)	1,1
3. Extension cord 90cm (Red, Black)	1,1
4. Adjusting rod	1
5. Soft case	1

Manual Download link at <http://www.acute.com.tw>

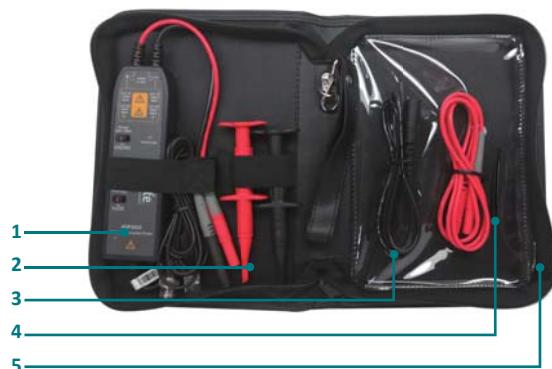

Acute

Acute Technology Inc.

PC-based T&M Instruments

Tel: +886-2-2999-3275

E-mail: service@acute.com.tw

<http://www.acute.com.tw>